

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**

AC



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

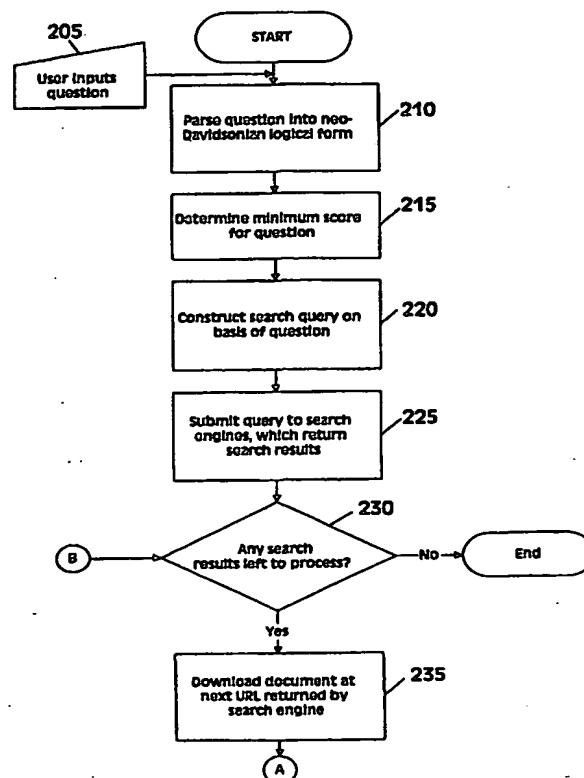
## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 17/30</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/25217</b>
		(43) International Publication Date: 11 June 1998 (11.06.98)

(21) International Application Number: **PCT/US97/22943**(22) International Filing Date: **4 December 1997 (04.12.97)**(30) Priority Data:  
**08/760,691**      **4 December 1996 (04.12.96)**      **US**(71) Applicant: **QUARTERDECK CORPORATION [US/US];**  
Suite 234, 13160 Mindanao Way, Marina del Rey, CA  
90292-9705 (US).(72) Inventors: **ULICNY, Brian, E.; 1221 1/2 Ozeta Terrace, Los**  
**Angeles, CA 90069 (US). JENSEN, John, B.; 1506 Palm**  
**Drive, Hermosa Beach, CA 90254 (US). ALLEN, Bradley,**  
**P.; 829 Loma Drive, Hermosa Beach, CA 90254 (US).**(74) Agent: **YANG, Joseph; Skadden, Arps, Slate, Meagher &**  
**Flom, LLP, Suite 220, 525 University Avenue, Palo Alto,**  
**CA 94301 (US).**(81) Designated States: **AT, AU, BG, BR, CA, CH, CN, CZ, DE,**  
**DK, ES, FI, GB, HU, IL, IS, JP, KR, LC, LU, MK, MX,**  
**NO, NZ, PL, PT, RO, RU, SE, SG, SI, SK, VN, YU,**  
**European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB,**  
**GR, IE, IT, LU, MC, NL, PT, SE).****Published***With international search report.**Before the expiration of the time limit for amending the*  
*claims and to be republished in the event of the receipt of*  
*amendments.*(54) Title: **METHOD AND APPARATUS FOR NATURAL LANGUAGE QUERYING AND SEMANTIC SEARCHING OF AN**  
**INFORMATION DATABASE**

## (57) Abstract

The invention relates to methods and apparatuses for receiving a user's query in natural language (e.g., English) form, searching an electronic database for sentences that may provide semantically meaningful answers to the query, identifying those sentences that are deemed to answer the question, and quantifying the degree to which the sentences answer the question.



## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MR	Mauritania	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	NB	Niger	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	RO	Romania		
CM	Cameroon	KR	Republic of Korea	RU	Russian Federation		
CN	China	KZ	Kazakhstan	SD	Sudan		
CU	Cuba	LC	Saint Lucia	SG	Singapore		
CZ	Czech Republic	LI	Liechtenstein	SR	Sweden		
DE	Germany	LK	Sri Lanka				
DK	Denmark						
EE	Estonia						

METHOD AND APPARATUS FOR NATURAL LANGUAGE QUERYING AND  
SEMANTIC SEARCHING OF AN INFORMATION DATABASE

FIELD OF THE INVENTION

5           This invention relates generally to the computerized searching of information databases and, more specifically, to searching the World Wide Web for answers to a natural language question.

10   BACKGROUND OF THE INVENTION

More and more information of the world's information is currently available on-line in the form of raw or loosely-formatted text. The operations and activities of the world's  
15 organizations and institutions, large and small, formal and informal, are increasingly stored in on-line repositories of memoranda, letters, text transcriptions, reports, catechisms of "Frequently Asked Questions" (FAQs), electronic mail, announcements, on-line newsgroup and bulletin board postings,  
20 World Wide Web homepages, catalogs, and brochures, and so on. Further, with the advent of Internet protocols for electronic exchanges of information, more and more of these documents are accessible to others throughout the world, at any time, and from any location.

25           The scale of this information collection presents a problem to those who would access it. There is no master catalogue of this material. Further, while attempts have been made to promulgate standards for content identification, these have not been widely adopted. With little indication of where

information is contained in this multitude of electronic documents, ~~how is the user to find the information that is~~ desired?

The field of information retrieval has been  
5 addressing itself to this problem since the middle of this century. A number of standard approaches have been developed and refined in the last quarter-century. The most popular of these are *keyword-based methods*.

The simplest keyword-based method is keyword  
10 indexing. The method begins by representing a document as a collection of words or strings of symbols rather than as an ordered sequence of meaningful propositions. Sophisticated techniques are then employed to match a query for information, represented as a set of strings of letters, to documents,  
15 again represented as sets of strings of letters.

In a popular variation of keyword indexing, words in a document collection are indexed to the documents that contain them. In order to access useful documents, users present a system with some collection of keywords and are  
20 returned references or pointers to documents that contain those keywords. More sophisticated variants of this technique allow users to specify further constraints on relevant documents beyond containing at least one of the keywords listed. For example, the user may specify keywords that must  
25 not appear in returned documents, the proximity of keywords within a document, the presence of multi-keyword phrases, and other Boolean conditions on the words that are contained in a relevant document. Such Boolean keyword searching techniques allow the user to make sophisticated constraints on documents  
30 that are to be considered relevant to the query. These techniques increase the precision of the returned document set

by allowing the user to request a more-focused set of documents from the information retrieval system.

---

A different class of keyword-based techniques automatically expands the user's query for documents to include equivalent variants of the user's query in order to increase the number of documents returned. This results in an increase in the information retrieval system's *recall*. Examples of these techniques include "stemming" query terms to a root form so that all of the morphological variants of a keyword are matched in a document. For example, stemming "computation" and "computer" to the same root will return documents containing either term when queried with one of them. Another technique involves adding synonyms of query terms to the query so that, for example, a query on "3M" automatically returns documents that contain the string "Minnesota Mining and Manufacturing," pre-determined to be equivalent to "3M," as well.

The drawbacks of keyword-based techniques are well-known. There is a considerable computational and storage overhead associated with setting up the index of keywords for a collection of documents. These indices must change as the collection changes in order to be maximally accurate. Additionally, although precision-enhancing techniques allow the user to put sophisticated Boolean constraints on the documents returned, they burden the user with formulating a request in a special, unintuitive formalism in order to achieve that precision. Field experience has shown that users are intimidated by Boolean logic and reluctant to learn the formalism well enough to be able to make sufficiently precise queries. Recall-enhancing techniques, on the other hand, aim at increasing the number of documents returned per query.

While this increases the chance that all of the relevant documents will be returned, it dramatically increases the amount of time the user must spend on an information retrieval task, if the user is to survey every returned document for the required information. For many tasks, the amount of information returned will be too large for the user to survey completely, and the user will be likely to guess at which of the returned documents should receive attention.

More importantly, there is an inherent limitation in keyword-based techniques because they represent documents only as collections of words rather than as meaningful expressions arranged into text for some communicative purpose. A sentence is more than a set of words; the structure of the sentence does most of the work in determining the meaning of the sentence. Both of the previous classes of techniques fundamentally represent documents as collections of alphanumeric characters, i.e. combinations of letters, and use a combination of the user's input and the system's design to return relevant documents on the basis of the words they contain. Unless precise information about word order is specified, they will, therefore, fail to distinguish between "the man bit the dog" and "the man was bitten by the dog."

An alternative class of information retrieval techniques, called *content markup*, addresses this issue by representing the meaning of a document rather than merely the words it contains. These techniques involve marking up stored text (or even non-textual data) with a representation of the meaning or content of the document in some formalism or other. As a simple example, an implementation of such techniques would be to provide a set of photographs with a set of keywords representing what the photographs depict. This would



have to be done manually. With a collection of text documents,  
~~an implementation of these techniques might involve marking up~~  
documents pertaining to financial transactions, say, with some  
representation of who is buying, who is selling, what is sold,  
5 and for how much. Documents could then be retrieved on the  
basis of their marked up annotations alone (e.g., "What did  
Company X buy?") or by means of their annotations as well as  
by keyword indexing.

The content markup approach has the advantage of  
10 pointing the user towards documents, or sections of documents,  
on the basis of the semantic or prepositional content of the  
document or its sections, rather than on the basis of the  
words that the document contains. This is certainly an

improvement over the keyword approach. Consider the task of  
15 finding needed information in a library. One normally doesn't  
approach this task primarily by means of an index of all the  
words in the all the books in the library. One uses a  
representation of the content of the books (a card catalog  
entry) to find the relevant books. Only once the relevant  
20 books are found does one use a keyword index (the index of a  
particular book) to find the relevant passages. On-line  
information retrieval, on the other hand, relies on a word-  
level representation of libraries of text to locate the  
information users want. There is no equivalent of a card  
25 catalog or book abstract available for on-line documents.

Content markup approaches can index a collection of  
information on the basis of the propositions that the text  
expresses or that characterize the text rather than the words  
that the text contains. In the example above, specific sorts  
30 of "metadata" (data about data) were attached to a collection  
of financial transaction documents, indicating who bought what

from whom and for how much. This would provide a useful way  
~~to find all and only the documents that talk about~~  
acquisitions by Company X but not acquisitions of Company X.  
This distinction would be very difficult to represent within a  
5 keyword approach.

The obvious difficulty with the content markup  
approach, however, is the markup process itself. It is  
difficult to automate this process, because marking up the  
documents requires an understanding of a document or text.

10 While it is easy to program a computer to index the words of a  
text; it has previously not been possible to program a  
computer to create a representation of the meaning of a text.  
Thus, content markup approaches have relied on manually  
created markup annotations of documents in a collection. This  
15 is a time-consuming, labor-intensive process that, again, must  
be constantly updated to keep in step with changes in the  
document collection.

Furthermore, content markups that seek to  
characterize the semantic content of an entire document or  
20 document section necessarily represent only some of the  
semantic content of that text. In our financial transactions  
example, any semantic content that is not represented in the  
metadata is not accessible to the information retrieval  
process. The unrepresented content will usually be most of  
25 the data; ultimately, the only complete representation of the  
semantic content of the document is the document itself.

Yet another class of applications, *semantic*  
*querying*, accepts a question submitted to the information  
retrieval system in a natural language format. A semantic  
30 analysis of the question is then used to translate the  
question into a specialized language or otherwise reformat it

to aid in information retrieval. Some applications of this type may translate queries submitted in English into Boolean logic, or into specialized database query languages such as SQL. Others parse the question into a semantic representation that can be matched against marked up content. Others analyze the question and produce a set of synonymous or near-synonymous queries, hoping to increase the recall of the system.

This class of applications represents a new level of sophistication in that they attempt to automatically understand the request for the information. The goal of these systems is to make it easier for users to ask for information or to retrieve more information. They fall short of understanding the information they scan and return, however.

These methods still treat the raw text information they process as sets of words, rather than meaningful texts. Thus, the semantic querying applications should properly be thought of as pre-processors to existing keyword-based or content markup techniques discussed previously.

The foregoing shows that there exists a need for an information retrieval technology that can generate semantic representations of both the question and target text on the fly and use these representations to allow the user to retrieve needed information. The Answer Me! system (the "invention") provides this new level of sophistication in information retrieval, constructing a semantic representation of retrieved text rather than just the question, in real time, to facilitate the retrieval of answers to questions posed in a natural language.

#### SUMMARY OF THE INVENTION

~~The invention is a software application designed to~~  
find answers to user-submitted queries posed in English from  
on-line documents. The invention consists of three major  
5 components (application programs) that will be described in  
detail below: a *user interface*, a *parser*, and a *sentence*  
*evaluator* that determines the extent to which a given sentence  
answers a submitted question.

The user begins the process of retrieving  
10 information by submitting a natural language questions (e.g.,  
English) to the user interface. For example, the user might  
ask, "When was Pluto discovered?" The submitted questions  
should be a direct request for the information, rather than a  
request to find the information. That is, users tend to  
15 anthropomorphize systems, but they should not make an indirect  
request for the information, asking, for example, "Can you  
find me the date of Pluto's discovery?" The question is then  
parsed into a form that will be useful for comparison with the  
returned answers. In addition, a minimum score that returned  
20 answers must meet or exceed is determined.

Next, the user interface accesses a database to  
identify a set of relevant documents to process for answers.  
This candidate set of documents might consist of the entire  
collection of a user's email messages, for example. In other  
25 cases (e.g., for WWW documents), it will be more efficient to  
process only a subset of a document collection. In such  
cases, the submitted question can be mapped to a keyword index  
query in order to narrow the range of candidate documents that  
may contain an answer to the submitted question.

30 Having identified a set of candidate documents, the  
invention processes each document, sentence by sentence,

looking for answers to the submitted question. For each sentence, ~~a judgment is made whether or not to parse the~~ sentence into its thematic representation. This decision is based on the presence or absence of keywords from the query in the sentence. Sentences with no keywords from the query are discarded, and those with keywords are kept for further processing.

Once a decision has been made to keep a sentence, a parse (a semantic as well as a syntactic representation) of the sentence is created. Each sentence is taken to represent an event or state, with each phrase within the sentence representing some role in that event or state. Thus, one phrase may represent the agents of an event, another the theme of the event (that which is acted upon), another the instrument, and so on. The result is a structure consisting of an event of a specified type, plus a series of relationships specifying exactly how the participants in the event participate in the event. For example, "Brutus stabbed Caesar" would be represented as expressing the existence of a stabbing event, with Brutus as the agent of the event, and Caesar as the "theme" (undergoer) of the event.

Thus, Answer Me! relies on detailed knowledge of the syntax and semantics of verbs (events) in contrast to other Artificial Intelligence systems that have been based on a detailed representation of the relationships of nouns (objects) -- indicating, for example, that a foot is a part of a leg, and so on. The class of English verbs is much smaller than the class of nouns, and they have a smaller range of meanings. Therefore, a detailed representation of the nature of objects requires much more storage space and is much more

complex than a detailed representation of the nature of events.

---

Finally, the similarity of the semantic representation of the candidate sentence to the similarly  
5 parsed question is evaluated. To what extent do they represent similar events? If there is a close enough match, the sentence is returned as an answer to the submitted question. The above steps are repeated for all sentences in the document, and all documents in the set of candidate  
10 documents. A metric reflecting the scoring of each document is presented to the user and can be used to order the answers. The metric is derived with the aid of a data structure that represents the relationship of various events on the basis of the verbs that express them. The data structure divides  
15 thousands of English verbs into various semantic classes and subclasses, representing relationships of synonymy and near synonymy between verbs. A metric of the closeness of meaning between any two verbs can be determined on the basis of their relative relationship within the data structure. A hypertext  
20 link to the documents from which the answers came can also be provided.

The major advantages of this approach over the keyword-indexing, content markup, and query analysis approaches are obvious. First of all, since the invention is  
25 attuned to what a sentence says, rather than merely the keywords it contains, it can retrieve information much more precisely. Secondly, since the semantic analysis of the text occurs in real time and on the fly, no time- , memory- and labor- consuming markup is required. Thirdly, the semantic  
30 content of each sentence is represented as opposed to a compressed semantic characterization of an entire document or

document section. Fourth, the invention contains knowledge  
~~about the similarity of word meanings. The invention contains~~  
a knowledge base of event types, and so, can recognize that a  
hunting event, for example, is semantically close to a seeking  
5 event, while recognizing the distinct syntactic  
characteristics of the verbs "hunt" and "seek." Lastly, and  
most importantly, by rapidly processing all of the sentences  
of a document semantically -- not just the submitted question  
-- the invention radically speeds up the process of finding  
10 answers to specific questions with a high degree of both  
precision and recall.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 is a high level block diagram of a computer  
adapted to perform the method of the invention.

Figures 2A - 2B show a flow diagram of the major  
functions that combine to enable the method of the invention.

Figures 3A - 3C show a flow diagram indicating the  
20 functioning of the parser that lies at the heart of the  
invention.

Figures 4A - 4D show a representative response, to a  
user question, in the form of an automatically generated HTML  
page.

25

#### DETAILED DESCRIPTION

Answer Me! locates text relevant to a user-specified  
question posed in a natural language format; analyzes that  
30 text for sentences that may provide answers to the question;  
identifies those sentences that are deemed to answer the

question; and evaluates the degree to which those sentences  
~~actually constitute answers to the question.~~

## 1. System Implementation

5

Figure 1 shows a block diagram of a computer system adapted to perform the method of the invention. Via a bus 105, the central processing unit ("CPU") 110 is connected to a random access memory 115, a user interface terminal 120, and a  
10 local storage 125. During operation, application programs (conceptually, a user interface, parser and evaluator -- described more fully below) are downloaded from local storage 125 to RAM 115 for execution by CPU 110. Local storage 125 may be a magnetic, optical, magneto-optical, electronic, or  
15 any other device capable of storing the necessary application programs. As a matter of convenience, the term "electronically accessible" shall be understood to encompass all such storage devices. The local storage 125 also stores the documents which are to be searched for the answer to the  
20 user's question. Of course, in a networked environment, documents could actually originate from a remote site, and the search resources used may be remote search resources as well. In that case, local storage 125 need not be a traditional mass storage device, but need only be a memory device of sufficient  
25 capacity to receive and buffer the desired information. Hence, either the local storage 125 or the remote site could serve as a document depository. In the preferred embodiment, the documents to be searched reside on the World Wide Web ("WWW") and may be accessed via an Internet browser (e.g.,  
30 Netscape); currently, a stand-alone user interface allows the user to input questions and view the progress of the



processing, but user interaction may be accomplished in a  
variety of ways. Of course, distributed computing

technologies (e.g. Sun's Java applets, Next's Web objects or  
Eólas' Weblets) also allow the remote location and/or

5 execution of the application programs themselves. Thus, the  
great operational flexibility afforded by a networked  
computing enrollment allows the system to be deployed for  
client, server, or hybrid operation depending on the local or  
remote provisioning of the application programs and/or  
10 documents.

In an embodiment suitable for standard PC based  
environments, Answer Me! is implemented as follows:

- 
- Hardware: 486 or higher-speed Intel processor.
  - 15 • Operating system: Windows 95 or Windows NT Workstation or  
Server v.3.5.1.
  - Memory: A minimum of 8 megabytes of RAM (16 megabytes  
recommended) and a minimum of 5 megabytes of free disk  
space.
  - 20 • Network connection: TCP/IP Internet dialup or permanent  
network connection using a 32-bit TCP/IP Winsock layer.
  - Web browser: Netscape Navigator or Microsoft Internet  
Explorer.
  - Search resources: Digital Equipment Corporation's Alta  
25 Vista search engine and InfoSeek's FAQ search service.

In this embodiment, Answer Me! was written in Visual C++ and  
compiled using Microsoft's Visual C++ Developer Studio v. 4.2.  
The above-mentioned application programs are implemented in a  
30 binary executable file (answerer.exe, ~1.5 Mb) and five  
associated data files. These include a part of speech data

file (lexicon.dat, ~250 KB), a verb classes index (evca93.txt, ~75KB), a thematic-grid index (theta.txt, ~15 KB), and two initialization files (ansrme.ini, 1 KB, and wlres.ini, 2 KB).

## 5 2. Querying and Candidate Answer Retrieval

Referring now to Figure 2, the method of the invention will now be described with respect to the above example of a WWW searcher. However, those skilled in the art will appreciate that the invention is usable for electronic document searching generally. At step 205, the user inputs the question and, at step 210, the question is parsed into a form useful for comparison with the returned answers. This form, which is known to those skilled in the art as neo-Davidsonian logical form, is also used during parsing of the returned answers, and will be described in detail in the following section entitled "Sentence Parsing." At step 215, a minimum score requirement is calculated for the question, which any answer returned to the user must exceed. A detailed discussion of the minimum score calculation is deferred until the section entitled "Evaluation" where all of the invention's scoring functions are discussed in a unified manner. At step 220, an appropriate search-engine query (e.g., the traditional keyboard-based, content markup or query analysis technique described in the BACKGROUND OF THE INVENTION) is constructed on the basis of the question. At step 225, the search engine query is submitted to the search engine or engines (e.g., WWW sites such as Alta Vista or InfoSeek) with which the invention has been enabled to communicate. These search engines return a set of pointers, to text documents, consisting of the documents' Uniform Resource Locations ("URLs"), i.e., their

addresses on the WWW. In this way, a candidate set of documents that may provide answers to the question is obtained. The invention will then use these addresses to retrieve each document, one by one, and process them to extract answers. In simpler contexts, e.g., where the searched database is highly specialized or relatively small, it may not be necessary to identify a subset of candidate documents and steps 220-225 can be omitted. At step 230, the process begins by looping through the list of returned search results. At step 235, each search result (a document at its returned URL) is downloaded to local storage 125 for linguistic processing. At step 240, the document is tokenized to yield a collection of sentences. During tokenizing, a document in a computer-readable format (e.g., a web page in HTML) is preprocessed for subsequent semantical analysis (parsing) by stripping out formatting tags (e.g., HTML tags) and other non-textual characters, while stepping through the document one character at a time until a sentence boundary is found. The tokenizer includes a routine for detecting abbreviations so that sentences are not ended prematurely.

### 3. Sentence Parsing

At step 245, now within a particular document, the process begins looping through each of the sentences. At step 250, each sentence is parsed as will be described in more detail with respect to Figures 3A-3D (collectively referred to as "Figure 3") below. The parsing of each sentence of Answer Me! comprises the following three steps:

#### a) Part of Speech Tagging

b) Phrase Identification

~~c) Linking of Phrases to Thematic Roles~~

Steps (a) and (b) may be thought of as grammatical  
5 (or syntactical) steps, while step (c) may be thought of as a  
semantic operation. Together, the three steps constitute what  
shall be referred to herein as semantic analysis, the term  
"semantic" as a matter of convenience being used throughout  
this document to include both semantic and syntactic  
10 operations.

The outcome of the parser is a mapping of each  
sentence (whatever its mood -- indicative, interrogative, or  
imperative) into a representation of its *logical* or *semantic*  
form. The semantic formalism used is a member of the family  
15 known to those skilled in the art as *neo-Davidsonian logical*  
*form*.

In his 1967 paper, "The Logical Form of Action  
Sentences" (reprinted in D. Davidson, *Essays on Actions and*  
*Events*, Oxford: Clarendon Press, 1980), Donald Davidson  
20 theorized that the logical form of at least some natural  
language sentences involves first-order quantification over a  
covert event position. Davidson offered this hypothesis  
primarily in order to explain "adverb-dropping inferences" in  
a natural way and, more importantly, using a finite logical  
25 vocabulary. Thus, in order to explain how it is that "John  
buttered the toast at midnight" entails "John buttered the  
toast", Davidson proposed that the logical form of the first  
sentence is actually that of a conjunction of predicates with  
an event argument bound by existential quantification over an  
30 event (here, "buttering"). In first-order logical notation,

the truth conditions of the sentence "John buttered the toast  
~~at midnight" would thus be (ignoring tense):~~

$Ee(\text{buttering}(e, \text{John}, \text{toast}) \ \& \ \text{at}(e, \text{midnight}))$

5 (1)

where "Ee" represents an existential quantifier binding an event variable *e*. Informally, this notation states that there is an event *e*, that the event is an argument of the predicate  
 10 *butter* along with "John" and "the toast," and that the event was at midnight. Thus, the fact that (1) entails "John buttered the toast" can be explained straightforwardly as an instance of conjunction elimination: from "A and B" infer "A"  
 (for sentences A and B). Davidson's theory eliminated the  
 15 need for an infinitely large vocabulary of *n*-place predicates, one for each possible set of adjuncts modifying a verb, and a set of inference rules relating them. Thus, in the above example, an indefinitely large set of predicates -- *butter*  
 (for John buttered the toast), *butter-at* (for John buttered  
 20 the toast at midnight), *butter-in* (for John buttered the toast in the bathroom), *butter-at-in* (for John buttered the toast at midnight in the bathroom) and so on -- is eliminated in favor of the single predicate *butter*.

Davidson's theory implicitly distinguished a verb's  
 25 *arguments*, or the minimal set of expressions a verb requires in order to form a grammatical sentence, from what linguistic theory terms its *adjuncts*, or those expressions that may be added to the arguments of a sentence to express the time or place at which an event took place. In the example above,  
 30 "John" and "the toast" are arguments of the verb "to butter" since the verb requires both a subject and a direct object

noun phrase in order to form a grammatical sentence; the phrases "at midnight" and "in the bathroom" are considered adjuncts of the verb "to butter" since prepositional phrases of these types are not necessary to form a grammatical sentence with "to butter" as the main verb.

Neo-Davidsonian analyses of the logical form of sentences go one step further than Davidsonian analyses in treating arguments and adjuncts equally as conjuncts existentially bound to the same event variable. Arguments are analyzed as bearing a particular *thematic* (or "*theta*") role within an event. Alternatively, the argument is sometimes said to bear a *thematic relation* to an event. Thus, the sentence "John buttered the toast" would be assigned the logical form:

$$Ee(\text{buttering}(e) \ \& \ \text{Agent}(e, \text{John}) \ \& \ \text{Theme}(e, \text{the toast})) \quad (2)$$

Informally, (2) states that there is an event *e*, that the event is a buttering, that the agent of the event is John, and that the *theme* of the event is the toast. Here *agent* and *theme* denote thematic roles. Thematic roles are gross distinctions among the ways in which things participate in events and states. The agent of an event is the participant who intentionally brings about the event. Necessary and sufficient conditions for being the theme of an event are the subject of considerable controversy in the literature, but, generally, the participant that undergoes the event, or that the event happens to, is the theme. A list of the thematic roles used within the analysis of the invention along with illustrative examples are given below:

---

External Argument (extarg): ~~John is sad; John~~  
appointed **Mary** president

Predicate (pred): John is a **barber**; John appointed  
5 **Mary president**

Agent (ag): **John** gave the book to Mary

Source (source): John took the book **from Mary**

Goal (goal): John gave the book to **Mary**

Theme (th): John gave **the book** to Mary

10 Benefactive (ben): John threw a party **for Mary**; John  
threw **Mary** a party

Instrument (ins): John cut the cake with a **knife**; the  
**knife** cut the cake easily.

---

Location (loc): John put the book **on the table**; John  
15 ate breakfast **before work**

Path (path): The planet circles **around the sun**

Manner (manner): The bread cuts **easily**; John cooked  
the spaghetti **by boiling it**

Purpose/Reason (purp): John skipped school to **see**  
20 **the game.**

Measure (measure): It snowed a **foot**, John weighed  
**200 pounds**

Result (result): John hammered the metal **flat**

Possessor (poss): **John** has the flu

25 Possessed (posd): John has **the flu**

Duration (dur): John drank beer **for an hour**

Conative (con): John poked **at the log**

Thematic roles are to be distinguished from  
30 grammatical roles such as *subject* and *direct object*, which  
refer to a phrase's position, rather than the way in which its

referent participates in an event. Grammatical roles  
~~distinguish the syntactic position of a phrase in a sentence~~  
in relation to the sentence's verb or some other phrase-  
heading element. Two phrases may have different grammatical  
5 roles, but bear the same thematic relation as in the  
sentences:

John gave Mary a book

(3)

10 John gave a book to Mary

(4)

In sentence (3), "Mary" is the direct object, however, and in  
sentence (4) "a book" is the direct object. In both cases,  
15 however, John is the agent of the giving event, Mary is the  
goal (the thing to which the giving is directed), and the book  
is the theme, the thing that undergoes the giving. In logical  
notation:

20  $Ee(\text{giving}(e) \& \text{Agent}(e, \text{John}) \& \text{Theme}(e, \text{the}$   
 $\text{book}) \& \text{Goal}(e, \text{Mary}))$  (5)

Thus, on the neo-Davidsonian account, sentence (3)  
logically entails sentence (4), and vice versa. Unlike the  
25 neo-Davidsonian analysis, Davidsonian analyses cannot account  
for these entailments directly: in order to explain an  
inference from (3) to (4) or from (4) to (3), additional  
inference rules would be necessary in a Davidsonian theory.  
This is a clear advantage for neo-Davidsonian accounts since  
30 most verbs are like "give" in that they allow their arguments  
to embody a variety of grammatical and thematic roles.



The essential features of a neo-Davidsonian account of logical form are (i) quantification over implicit event variables, (ii) thematic role analysis of the semantics of argument positions, and (iii) the treatment of verbs as one-place predicates of events. The invention thus embodies a neo-Davidsonian analysis of sentences. The analysis differs from discussions of neo-Davidsonian logical form in the literature only in how these analyses are encoded. Rather than embody the logical forms as formulas of first-order logic, the invention maps parsed sentences into C++ data structures (called "objects") stored in computer memory. The analysis could equally well map sentences into other computational data structures, such as assertions in Prolog or Java classes. In the preferred embodiment, each C++ object mapped to a sentence represents an event; the type of event and the thematic roles identifying the participants in the event are given as member variables within that object.

Neo-Davidsonian logical form is described in more detail in the following references: Terence Parsons, *Events in the Semantics of English: A Study in Subatomic Semantics*, MIT Press (1990); Gabriel Segal and Richard Larson, *Knowledge of Meaning: An Introduction to Semantic Theory*, MIT Press (1995); James Higginbotham, "On Semantics," *Linguistic Inquiry* 16:547-593 (1983). Further references on linking theory include: Edwin Williams, *Thematic Structure in Syntax*, MIT Press (1994); David Pesetsky, *Zero Syntax: Experiencers and Cascades*, MIT Press (1995). The nature and status of thematic roles in contemporary semantic theory is described more fully in the following references: William Frawley, *Linguistic Semantics*, Lawrence Erlbaum Associates (1992), Chapter 5; David Dowty, "On the Semantic Content of the Notion of

'Thematic Role'," in G. Chierchia, B. Partee and R. Turner, eds., *Properties, Types and Meaning*, vol. 2, *Semantic Issues* (pp. 69-129) Kluwer (1989); "Thematic Proto-Roles and Argument Selection," *Language* 67:547-619 (1991); Terence Parsons, 5 "Thematic Relations and Arguments," *Linguistic Inquiry* 26:635-662 (1995).

The invention relies on and develops recent theoretical work on the relationship of grammatical roles and thematic roles in the literature of the rubrics of neo- 10 Davidsonian logical form and linking theory, as described in Brian Edward Ulicny, *Issues in the Philosophical Foundations of Lexical Semantics*, Chapter 3, Doctoral Dissertation, Department of Linguistics and Philosophy, Massachusetts 15 Institute of Technology (accepted May, 1993) and Douglas A. Jones, Robert C. Benwick, Franklin Cho, Zeeshan R. Khan, Naoyuki Nomura, Anand Radharkrishnan, Ulrich Sauerland and Brian Ulicny, *Verb Classes and Alternations in Bangla, German, English and Korean*, Memo 1517, Artificial Intelligence Laboratory, Massachusetts Institute of Technology (dated 20 August, 1994; available for distribution as an AI Lab Memo in Spring, 1996). The AI Lab Memo describes a crude parser that implemented a function from sentences to a *grammaticality judgment* of good or bad. A sentence was deemed good (grammatical) if it had at least one acceptable parse and was 25 bad otherwise. Thus, the AI Lab Memo parser did not attempt to find a unique parse for a sentence, and its resulting logical form analysis would effectively reflect several thematic assignments. In addition, it had a very limited vocabulary and did no morphological analysis. Its coverage 30 was extremely limited, being basically designed to analyze the example sentences of Beth Levin's book, *English Verb Classes*

and Alternations. Thus, only past tense verb forms were  
~~handled and no attempt was made to handle intra-sentence~~  
punctuation, questions, imperatives, relative clauses, passive  
verbs, pronoun resolution, or phrase movement of any sort.

5 Finally, the AI Lab Memo parser operated on single sentences  
rather than entire documents, and did not attempt to evaluate  
sentences as answers to submitted questions.

In contrast, the parser of the present invention  
represents a significant improvement over the AI Lab Memo  
10 parser's deficiencies in each of the above-mentioned  
semantical and operational respects. Referring now to Figure  
3, the present invention's process of parsing a sentence  
summarized as step 250 in Figure 2 is explained in greater  
detail.

15

**a) Part of Speech Tagging**

At steps 305 and 310, the sentence in the buffer is  
passed, one word at a time, to a part of speech tagger for  
20 morphological analysis. Morphological variants of words  
result, for example, from situations such as prefix/suffix  
addition, inflection for past tense, etc. At step 315, the  
part of speech tagger assigns a part of speech tag to each  
word of the sentence based upon the word's context and  
25 occurrence. The part of speech tag is selected from a total  
of 48 predetermined choices, such as: noun, verb,  
preposition, adjective, etc. The actual tag assigned depends  
at least in part on the last tag assigned, which reflects the  
selection properties of the preceding word. For example, if a  
30 word can be both a noun and a verb (e.g. book), the tagger  
will return NOUN if the preceding word was a determiner (as in

the book) or VERB if the preceding word was an auxiliary (as  
~~in might book the hotel room).~~ Reference to the context of a  
word in tagging is especially crucial for English, which has  
an inordinate number of verbs that are homonymous with nouns  
5 and adjectives that are homonymous with verbs; morphology  
won't distinguish the part-of-speech in these cases.

**b) Phrase Identification**

10 At step 320, the sentence is analyzed in accordance  
with the syntactic theory known to those skilled in the art as  
Case Theory. Case Theory, which is a subtheory of the school  
of syntactic analysis known as Government and Binding Theory,  
asserts that every phrase of a sentence must paired one-to-one  
15 with a case assigner. Parts of speech that are case assigners  
include: TENSE (INFLECTION), VERBS and PREPOSITIONS. Thus,  
the sentence

John hit the ball Mary

20 (6)

is ungrammatical, in part, because the phrase "Mary" has  
nothing to assign it Case. (Case need not be overtly marked  
in the morphology of a word.) In the context of the  
25 invention, case markers are used to identify *phrase boundaries*  
and to parse sentences into their constituent phrases. These  
and other aspects of Case Theory are described more fully in  
Liliane Haegeman, *Introduction to Government and Binding*  
*Theory*, 2<sup>nd</sup> Edition, Basil Blackwell (1994), which is  
30 incorporated herein by reference. Thus, at step 325, the  
sentence is divided into its constituent phrases by

successively adding its words to a phrase buffer until, at  
~~step 330, the presence of a new case assigner is encountered~~  
(if overt) or can be inferred (if covert). For example, the  
sentence "Brutus stabbed Caesar in the forum" will be divided  
5 into the phrases: <Brutus><stabbed><Caesar><in the forum> on  
the basis of encountering the case assigners Past (TENSE),  
"stab" (VERB), and "in" (PREPOSITION).

At step 330, when an entire phrase has been  
detected, that phrase is assigned a feature that characterizes  
10 the phrase as a whole or that the phrase may be said to  
project. A noun phrase is assigned the (default) feature N.  
A prepositional phrase's head preposition is assigned as its  
phrase feature; the properties of this preposition will

determine the role it plays in the sentence. In other cases,  
15 features are assigned to a phrase on the basis of linguistic  
rules. For example, in the sentence "John cooked the  
spaghetti by boiling it", the phrase "by boiling it" would be  
assigned the feature MANNER because it describes how the event  
described by the main verb was accomplished.

20 Verbs are inserted into the sentence's phrasal  
constituents and assigned the feature V. Only the head verb  
is included; auxiliaries, negations and other elements that  
modify the head verb are not included. Furthermore, a verb's  
TENSE and ASPECT are not considered for the purposes of  
25 information retrieval here. By way of example, the sentence  
"Brutus killed Caesar in the forum by stabbing him" would be  
mapped to the phrasal representation <N, Brutus><V, kill><N,  
Caesar><IN, in the forum><MANNER, by stabbing him>.

There are cases in which certain adjustments are  
30 made by the invention - for example, in the case of  
interrogative or passive sentences -- to counter the effects

of what those skilled in the art of Government and Binding  
~~Theory consider the movement of phrases from their default~~  
position. This is done in preparation for the thematic  
linking step, so that all arguments of a verb will appear in a  
5 canonical position with respect to the verb of which they are  
an argument. The surface word order of questions is  
understood in Government-Binding syntax to result from the  
movement of underlying phrases from their position in what is  
called D-structure through the movement of various phrases and  
10 elements to the front of the sentence. ' Thus,

Who did Brutus stab?

(7)

15 is understood to result from the movement of "who" and the  
past tense morpheme from their (default) position as the tense  
node and direct object in the sentence, as in "Brutus  
stab+PAST (stabbed) who". The invention thus analyzes the  
question (7) as the sequence of phrases:  
20 <N, Brutus><V, stab><N, who> rather than  
<N, who><N, Brutus><V, stab> by reversing the process of  
question-formation in English. The auxiliary "did" shows up  
in the question (7) as the realization of the past tense  
marker formerly visible in the morphology of the verb form  
25 "stabbed". Because "did" does not function as a verb in (7)  
(unlike in "Brutus did a dance"), it is ignored. Similar  
movement and reanalysis by the invention also occurs in  
relative clause constructions and raising verb constructions  
(transforming, e.g., "It is easy to please John" to "John is  
30 easy to please").

Other forms of adjustments may also be performed at this stage, if necessary. For example, Answer-Me! replaces pronouns with their antecedents when such replacements are unambiguous. Thus, the sentence "John shaved himself" is mapped to the set of phrases: <N, John> <V, shave> <N, John>. Similarly, "John met the man who rescued his dog" is mapped to: <N, John> <V, met> <N, the man> <N, the man> <V, rescue> <N, his dog>. While "his dog" cannot mean the rescuer's dog, it can mean someone other than John's dog; thus, no attempt is made to link the potentially ambiguous "his" with its antecedent.

#### c) Linking of Phrases to Thematic Roles

At this point, the sentence has been grammatically segmented into a collection of phrases. These phrases fall into one of the following categories: *verbs*, *arguments* of those verbs, or *adjunct phrases* -- optional phrases indicating, for example, the location or time of an event. The last step in parsing is to link each verb with its associated arguments using the technique of *thematic analysis*. Thematic roles are also assigned to adjunct phrases when this is possible.

The invention contains a data structure that associates each verb with the set of "thematic grids" it can select as arguments. A thematic grid is a vector of thematic roles. Since verbs may assume several forms, based on their inflection for tense and agreement, the index is based on a stemmed form of the verb. The stemmed form of the verb is derived by means of an algorithm known to those skilled in the art as the Porter stemming algorithm, although other well-

known stemming techniques would work equally well. The Porter  
~~stemming algorithm is described more fully in Edward Frakes~~

and Ricardo Baeza-Yates, *Information Retrieval: Data  
Structures and Algorithms*, Chapter 8, "Stemming Algorithms,"

5 Englewood Cliffs: Prentice-Hall (1992), which is incorporated  
herein by reference. Thus, the verb forms "give", "gives",  
"given" and so on, are mapped to the stem "giv" by the Porter  
stemming algorithm. This stemmed form is mapped to a set of  
thematic grids, containing <agent, theme, goal> corresponding  
10 to "John gave a book to Mary", <agent, N/goal, theme>  
corresponding to "John gave Mary a book" and so on.

In addition to those mentioned above, certain  
specialized conditions on thematic roles may be used by the  
linking algorithm for greater specificity. One such  
15 specialized thematic role involving a slash (i.e., A/B)  
requires two conditions on a phrase: the phrase must be headed  
by the feature compatible with the element to left of the  
slash (A), and the phrase must play the role to the right of  
the slash (B). This is useful for verbs that select  
20 particular prepositions in certain contexts, or for thematic  
roles which are usually headed by prepositions but sometimes  
appear as plain noun phrases, as with "N/goal" above. For  
example, in the sentence "John sprayed the wall with paint."  
the verb "spray" is associated with thematic grid <agent,  
25 N/location, with/theme>, among others. To discharge the  
thematic role "with/theme", a phrase headed with the  
preposition "with" must be the second argument to the right of  
the verb when it is linked. It will be assigned the thematic  
role Theme.

30 Another specialized thematic role "V/theta" (for  
some thematic role theta) is used to indicate the presence of



verbs that incorporate nouns playing a thematic role. This analysis derives from theoretical work by Mark Baker; see his monograph *Incorporation: A Theory of Grammatical Function Changing*, University of Chicago Press, 1988, for further details on the conditions under which verbs are thought to incorporate arguments. As a simple example, in the sentence "It snowed," the analysis of the invention takes the verb "snow" to have incorporated the noun "snow", which is assigned the Theme role of the event.

Referring specifically to Figure 3, the actual linking of a verb to its corresponding thematic roles is summarized as a single step 335. However, this is really a two-part step: (i) identification of all possible (candidate) thematic grids for the verb, and (ii) selection of a particular (best) thematic grid for the verb from the list of possible candidates.

#### (i) Determination of Candidate Thematic Grids

Identification of candidate thematic grids involves the use of two indices. The first index is a classification of all possible verbs by verb classes. The second index is a listing of all possible thematic roles selected by each verb class of the first index. These two indices are described in greater detail in the paragraphs below.

Every verb in the verb class index is assigned to some class (or classes) based on the verb's meaning and the syntactic behavior of the verb's arguments. For details of the classification scheme, see Beth Levin, *English Verb Classes and Alternations: A Preliminary Investigation*, University of Chicago Press (1993), which is incorporated

herein by reference. The set of syntactic frames within which  
~~a verb can express its arguments is known to those skilled in~~

the art as its set of alternations. For example, verbs of the  
Poke class participate in the following alternations (\*

5 denotes ungrammatical sentences, put here for illustration):

"Allison poked the needle through/into the cloth."

"Allison poked the needle against the cloth."

"Allison poked the cloth with a needle."

10 "The needle poked the cloth."

"Allison poked the cloth."

\* "The cloth poked."

"Allison poked Daisy in the ribs."

\* "The cloth pokes easily."

15 "Allison poked Daisy's ribs."

\* "Allison poked the ribs (meaning Daisy's ribs)."

Members of this class include the verbs *dig*, *jab*,  
*pierce*, *poke*, *prick*, and *stick*. Their behavior contrasts with  
20 those of the *Touch* class, for instance, which does not allow  
*through* or *into* phrases as arguments. That is, the sentence  
"Carrie touched the stick through/into the cat" is  
ungrammatical. This would seem to indicate that proper usage  
of the *Poke* verbs necessarily involves some sort of directed  
25 motion, which can be expressed by a *through* or *into* phrase,  
whereas the *Touch* verbs do not. The *Touch* verbs simply  
express a relationship between two objects, while the *Poke*  
verbs specify something about the relationship of the  
instrument used in the poking to the material substance of the  
30 thing poked.

The second index maps a verb class to the *thematic grids* associated with the various alternations in which the verbs in that verb class may participate. For example, four of the thematic grids that *clear* (and other verbs of its class) project are:

<Agent, Theme, Location> as in "John cleared the dishes from the table."

<Agent, Location, of/Theme> as in "John cleared the table of dishes."

<Theme> as in "The screen cleared."

<Agent, Theme> as in "John cleared the screen."

In the method of the invention, each verb in the sentence is looked up in the first index to yield one or more verb classes. Then, for each verb class, all its possible thematic grids are determined from the second index. In this way, all possible candidate thematic grids for a given verb are determined.

At step 340, any necessary adjustments to the thematic structure of *passivized verbs* will be made. Passivized verbs do not deploy the thematic role of their subject (except, optionally, in a *by*-phrase); thus, a thematic role for the non-passivized verb's subject should be assigned only if there is a *by*-phrase (e.g., "Brutus was stabbed by Caesar.").

#### (ii) Selecting the Best Thematic Grid for a Verb

Having segmented a sentence into phrases and determined the verbs' candidate thematic grids, the best

candidate thematic grid must be determined for each verb and  
its associated arguments. At step 345, the candidate thematic  
grids are rearranged in order of decreasing length. This  
allows the longest grids to be evaluated first, because a  
5 successful match to a longer (and thus more precise) grid is  
preferable to a shorter grid. At step 350, the linker steps  
through the thematic grids one at a time and, at step 360,  
attempts to assign each verb and its arguments to a best  
thematic grid based on the verb's semantics. That is, the  
10 linker tries assigning thematic roles to phrases, starting  
with the leftmost verb in the sentence. If the thematic roles  
in the verb's thematic grid (e.g. <Agent, Theme>) are  
compatible with the features of the phrases immediately to the  
left of the verb and following the verb, then the phrases are  
15 assigned to those roles. For example, if a verb selects an  
Agent as its subject, or external argument, the linker will  
consider a phrase immediately to the left of the verb to be  
compatible if it is a noun phrase (has feature N) or has some  
other feature compatible with the Agent role.

20 One particular situation involving Agent roles  
deserves special consideration. Referential dependencies  
between pronouns and overt noun phrases within a sentence or  
due to ellipses, both of which might result in a multiplicity  
of phrases assigned to certain thematic roles, are handled by  
25 allowing only one set of thematic roles to be assigned. For  
example, if more than one Agent is found in a sentence, the  
second agent is appended to the previously assigned Agent  
phrase. This allows the system to recognize some anaphoric  
relations that might otherwise be missed. For example, the  
30 sentence "If a man owns a donkey, he beats it," contains two  
Agents ("a man," "he") and two Themes ("a donkey," "it"). By

appending phrases to already assigned thematic roles, the  
~~system will be able to recognize the donkey sentence as an~~  
answer to the question "Does a man beat a donkey?"

Within the neo-Davidsonian paradigm, the invention's  
5 treatment of multiple verbs can be thought of as an  
endorsement of the axiom that for every group of basic level  
events, there is an event (a super-event) that consists of the  
occurrence of all those events. The agents of those  
constituent events are the agents of the super event; the  
10 themes of the constituent events are the themes of the super  
event, and so on.

At step 365, if all of the phrases are assigned a  
thematic role and all of the thematic grid's thematic roles  
have been assigned, we say that the linking has converged;  
15 otherwise it has *crashed*. At step 370, the first assignment  
of thematic roles that converges, if one occurs, is retained.  
Otherwise, at step 375, the assignment of thematic roles to  
phrases that comes closest to converging is retained. That  
is, the assignment that crashes the least badly is retained if  
20 none has converged. Phrases that don't get assigned a  
thematic role are assigned a special "adjunct" role. If  
convergence has not occurred, the process of steps 360-370 is  
repeated for the remaining candidate thematic grids, in an  
attempt to find a candidate grid that actually converges.  
25 Finally, at step 380, the best thematic grid is outputted for  
score evaluation (steps 255-260 of Figure 2).

Although the foregoing has been described in the  
context of indicative sentences (statements), other types of  
sentences such as interrogatives (questions) and imperatives  
30 (commands) are parsed by means of the same algorithm. For  
questions, the parser takes into account the movement of wh-

phrases and produces logical forms thematically equivalent to  
~~the corresponding statement by reordering the question's~~

interrogative (wh-) phrases and by deleting the auxiliary as  
described previously in the section entitled "Phrase

- 5 **Identification."** For imperatives, which have no subjects, the  
missing subject is not assigned a thematic role, but the  
relevant adjustment is made in judging whether the assignment  
has converged.

10 **4. Evaluation**

Referring now to Figure 2, at step 255, once the  
best parse has been found for a sentence, it is evaluated as  
to the degree to which it answers the submitted question.

- 15 Answerhood is measured by a graded relation between a sentence  
and a question. A sentence may either be a full answer, a  
partial answer, or a non-answer to a submitted question.  
Partial answers with scores greater than a predetermined  
minimum score for the question are returned as well as full  
20 answers.

As mentioned previously (step 210 of Figure 2),  
after a submitted question has been parsed (in an identical  
manner to that described for sentences), it is assigned a  
minimum score that must be met or exceeded by a sentence, if  
25 that sentence is to be deemed an answer to the question. This  
score is given by the number of thematic roles assigned to the  
question. Thus, the questions "Who discovered Pluto?" and  
"Did Tombaugh discover Pluto?" would both be assigned a  
minimum score of 2, because they both contain an Agent ("Who"  
30 and "Tombaugh", respectively) and a Theme ("Pluto").  
However, the question "How did Tombaugh discover Pluto?" would

be assigned a minimum score of 3, since it also contains the  
~~additional thematic role of Manner ("How").~~

At step 255, a sentence is evaluated with respect to the submitted question as follows. First, a comparator  
5 determines, for each thematic role in the sentence, whether the phrase assigned to that thematic role in the question (e.g., the question's Agent) literally (exactly) matches a substring of the phrase assigned to that thematic role in the sentence. For each such match, a scorer increases the score  
10 by one. A sentence having a score of zero is discarded. Next, the comparator and scorer determine whether any of the question's thematic roles and if so, are occupied by *wh*-phrases (e.g., interrogatives such as "who," "which," "why,"  
~~"how," "when," "where," and "what")~~ in the sentence and, if  
15 so, increases the score by one per occupancy. In all the above, when dealing with the special case of an imperative sentence, its lack of a subject is taken into account so as not to exclude it from consideration on that basis. Finally, verb-based comparisons are made between questions and each  
20 sentence. Any such match, either between verbs or between verb classes, also increases the score by one per match. More generally, by arranging the verb classes in the first index into a tree structure, the semantic distance between the sentences and the question's verb classes could be quantified  
25 as the numerical distance between them in the tree. Such a numerical distance could be used an inverse measure of answerhood, with shorter distances causing larger score increases.

At step 260, sentences that score higher than the  
30 minimum score associated with the question are presented to the user, or otherwise stored, as answers to the submitted

question. In the present invention, an HTML page with the answers, their scores, and a hypertext link to the page from which they were extracted, is constructed and automatically updated for the user, who accesses it through a Web browser.

5           Processing continues until all sentences (step 245) of all the documents returned by the search query (step 270) have been evaluated. Figures 4A-4D show a representative response to a user question of the form "When was Pluto discovered?" in the form of an automatically generated HTML  
10   page.

          In the present invention, processing of the documents is done on an as-needed basis. The parses are not stored for future use. It would present no technical  
15   difficulty to store the data structures that result from the parsing in a database so that question-answering could directly access the stored parses, rather than parsing the sentences as needed.

          Although the present invention has been described in terms of a particular embodiment, it will be appreciated that  
20   various modifications and alterations may be made without departing from the spirit and scope of the invention. Therefore, it is intended that the scope of the invention be limited only by the following claims.



CLAIMS

---

What is claimed is:

- 1 1. A method for searching an electronically accessible  
2 document depository to provide at least one answer to a  
3 question posed by a user in a natural language, comprising  
4 the steps of:
  - 5 (a) identifying at least one candidate document, from  
6 said depository, that may contain at least one answer to  
7 said question;
  - 8 (b) individually processing each said candidate document  
9 to locate said answers using thematic linguistic  
10 analysis; and
  - 11 (c) presenting said answers to said user.
- 1 2. The method of claim 1 where the step of identifying said  
2 candidate document includes:
  - 3 (a) receiving a natural language question;
  - 4 (b) submitting an appropriate query, based on the  
5 question, to a search engine that references said  
6 depository; and
  - 7 (c) receiving, from said search engine, an address for  
8 each said candidate document that may contain an answer  
9 to said question.
- 1 3. The method of claim 2 where the step of submitting said  
2 query includes formulating a keyword-based representation  
3 of the question to be submitted to the search engine.

1 4. The method of claim 2 where said document depository is the  
2 ~~World Wide Web and where said candidate documents are web~~  
3 pages.

1 5. The method of claim 1 where the step of processing each  
2 said candidate document includes:  
3 (a) identifying at least one sentence within said  
4 candidate document;  
5 (b) determining whether each identified sentence should  
6 be parsed;  
7 (c) for each sentence to be parsed, parsing it into its  
8 neo-Davidsonian logical form; and  
9 (d) for each parsed sentence, evaluating the degree to  
10 which it constitutes an answer to said question.

1 6. The method of claim 5 where the step of parsing each said  
2 sentence includes:  
3 (a) decomposing said sentence into at least one verb and  
4 a plurality of arguments associated with said verb, said  
5 verb and said arguments collectively defining a first  
6 plurality of phrases; and  
7 (b) determining a thematic role corresponding to each  
8 said phrase.

1 7. The method of claim 6 further comprising the step of  
2 morphologically analyzing said sentence prior to said step  
3 of decomposing said sentence.

1 8. The method of claim 6 where said step of decomposing said  
2 sentence includes moving at least one phrase within said  
3 sentence.

---

1 ~~9. The method of claim 8 where said step of moving said phrase~~  
2 is performed with respect to an interrogative sentence.

1 10. The method of claim 8 where said step of moving said  
2 phrase is performed with respect to a passive sentence.

1 11. The method of claim 8 where said step of moving said  
2 phrase is associated with a relative clause construction.

1 12. The method of claim 6 where said step of decomposing said  
2 sentence includes replacing at least one pronoun with an  
3 antecedent thereof.

---

1 13. The method of claim 6 where said step of determining said  
2 thematic roles includes:  
3 (a) for each verb, determining at least one candidate  
4 thematic grid, each said candidate thematic grid  
5 including a plurality of thematic roles; and  
6 (b) for each verb, selecting one of said candidate  
7 thematic grids whose thematic roles best match the  
8 arguments associated with that verb.

1 14. The method of claim 13 where said step of determining  
2 said thematic grid includes stemming a verb of said  
3 sentence.

1 15. The method of claim 5 where said sentence is of  
2 imperative form.

1 16. The method of claim 5 where said sentence is of  
2 ~~interrogative form.~~

---

1 17. The method of claim 5 further comprising the step of  
2 parsing said question into a neo-Davidsonian logical form  
3 including a second plurality of phrases.

1 18. The method of claim 17 where said step of evaluating the  
2 degree to which said sentence constitutes an answer to said  
3 question includes:

4 (a) searching for matches between said sentence's first  
5 plurality of phrases and said question's second  
6 plurality of phrases; and  
7 (b) incrementing a numerical score for said sentence  
8 upon the occurrence of each said match.

1 19. The method of claim 18 where said step of searching for  
2 matches includes literal matching.

1 20. The method of claim 18 where said step of searching for  
2 matches includes interrogative matching.

1 21. The method of claim 18 where said step of searching for  
2 matches includes verb-based matching.

1 22. The method of claim 18 where said step of presenting said  
2 answer to said user includes providing those sentences  
3 whose scores satisfy a minimum score requirement.

1 23. The method of claim 17 where said step of parsing said  
2 question includes:

- 3 (a) decomposing said question into at least one verb and  
4 ~~a plurality of arguments associated with said verb, said~~  
5 verb and said arguments collectively defining said  
6 second plurality of phrases; and  
7 (b) determining a thematic role corresponding to each  
8 said phrase.

1 24. The method of claim 23 where said step of determining  
2 said thematic roles includes:

- 3 (a) for each verb, determining at least one candidate  
4 thematic grid, each said candidate thematic grid  
5 including a plurality of thematic roles; and  
6 ~~(b) for each verb, selecting one of said candidate~~  
7 thematic grids whose thematic roles best match the  
8 arguments associated with that verb.

1 25. A system for searching an electronically accessible  
2 document depository to provide at least one answer to a  
3 question posed by a user in a natural language, comprising:

- 4 (a) a parser coupled to receive:  
5 (i) said question, and  
6 (ii) from said depository, at least a portion of  
7 said candidate document that may contain an answer to  
8 said question; and  
9 (b) an evaluator coupled to receive from said parser:  
10 (i) a first output derived from said question and  
11 (ii) a second output derived from said portion of  
12 said candidate document; and  
13 said evaluator configured to derive from said first and  
14 second outputs each said answer to be presented to said  
15 user.

~~1 26. The system of claim 25, further comprising a keyword-~~  
2 based searcher for identifying said candidate document from  
3 said depository.

1 27. The system of claim 25, where said depository is the  
2 World Wide Web and said candidate document is a web page.

1 28. The system of claim 25 further comprising a tokenizer  
2 coupled to said parser, said tokenizer configured to  
3 receive said candidate document from said depository and to  
4 identify said portion of said candidate document, said  
5 portion including at least one sentence of said candidate  
6 document.

1 29. The system of claim 28, where said evaluator includes:  
2 (a) a comparator coupled to said parser to receive said  
3 first and second outputs and to determine any matches  
4 therebetween; and  
5 (b) a scorer coupled to said comparator to receive said  
6 matches and to assign a rank to each said match.

1 30. The system of claim 29 where said matches and scores are  
2 literally-based.

1 31. The system of claim 29 where said matches and scores are  
2 interrogative-based.

1 32. The system of claim 29 where said matches and scores are  
2 verb-based.

1 33. The system of claim 25, where said parser includes

2 ~~(a) a phrase boundary identifier configured to~~

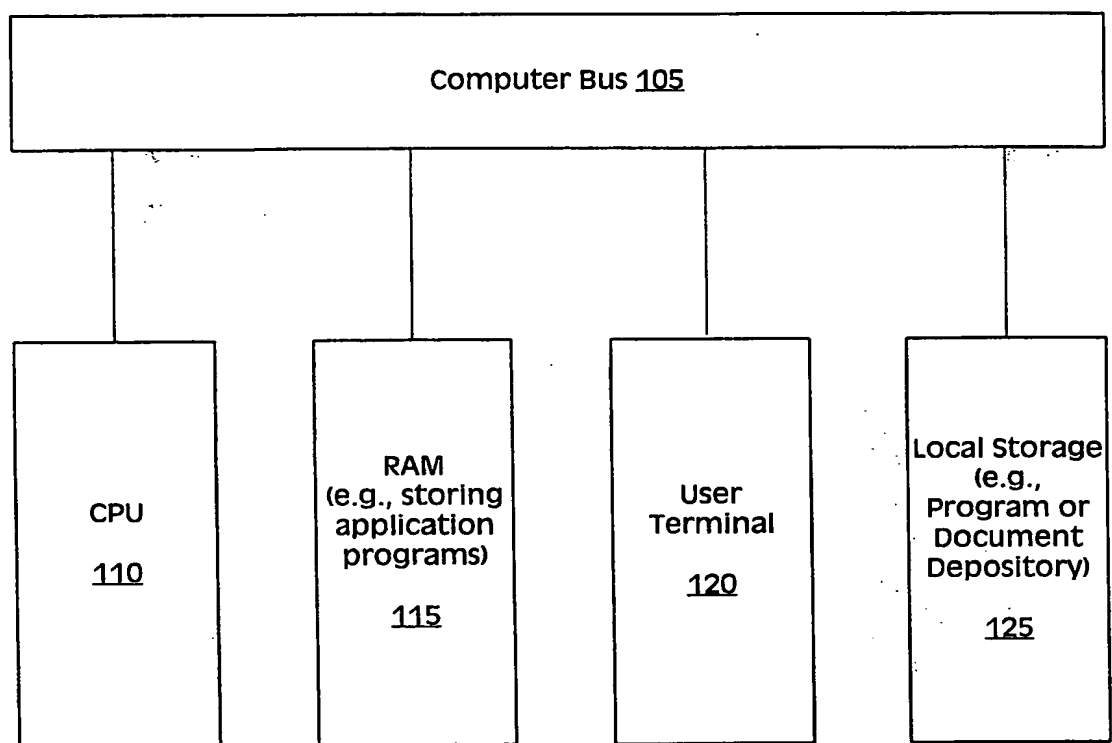
3 decompose:

4 (i) said portion of said candidate document into a first  
5 plurality of phrases, and

6 (ii) said question into a second plurality of  
7 phrases; and

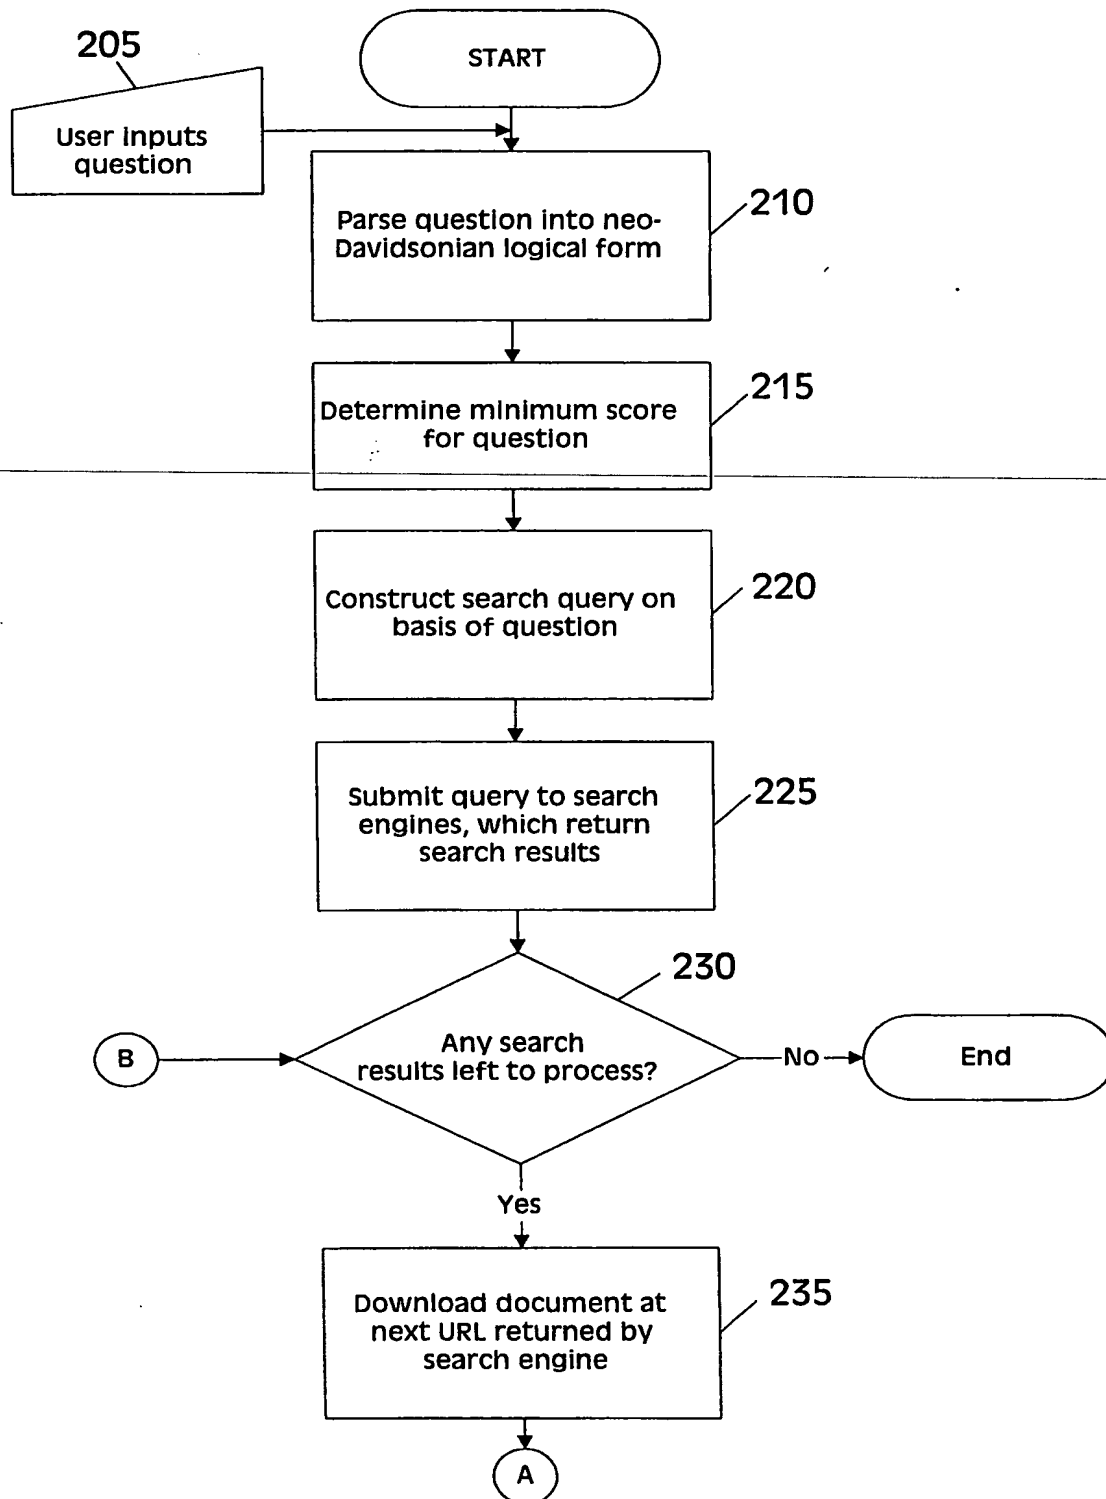
8 (b) a linker coupled to said phrase boundary identifier,  
9 said linker configured to determine a thematic role  
10 corresponding to each of said phrases;  
11 such that said first output includes said first plurality  
12 of phrases and their corresponding thematic roles and said  
13 second output includes said second plurality of phrases and  
14 their corresponding thematic roles.

1/10

**Fig. 1**

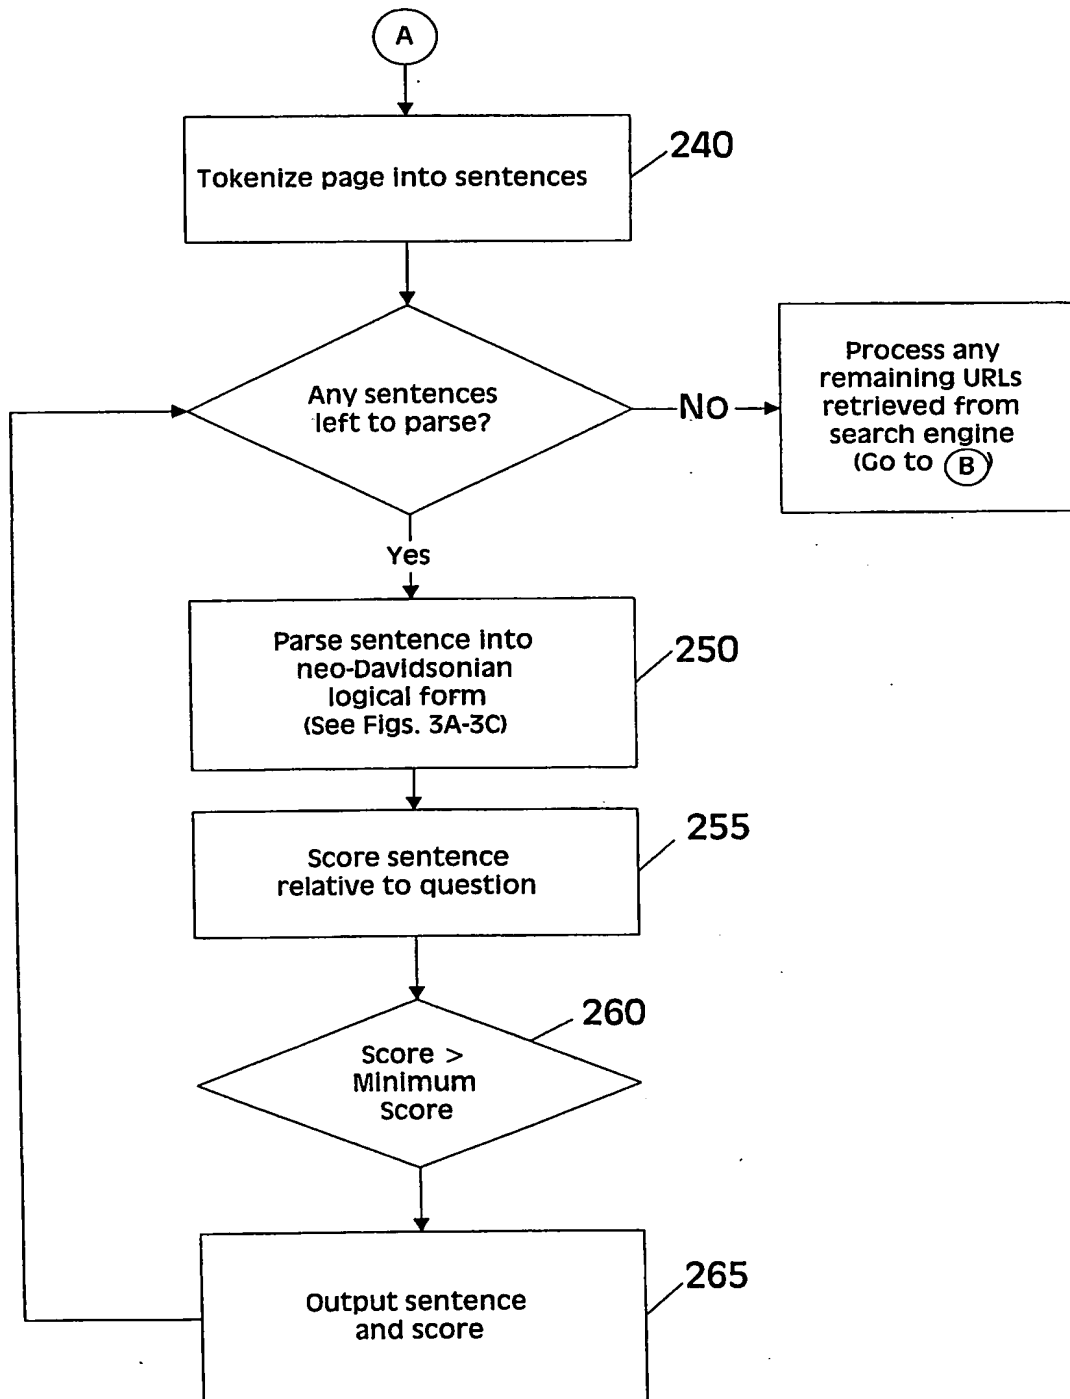


2/10

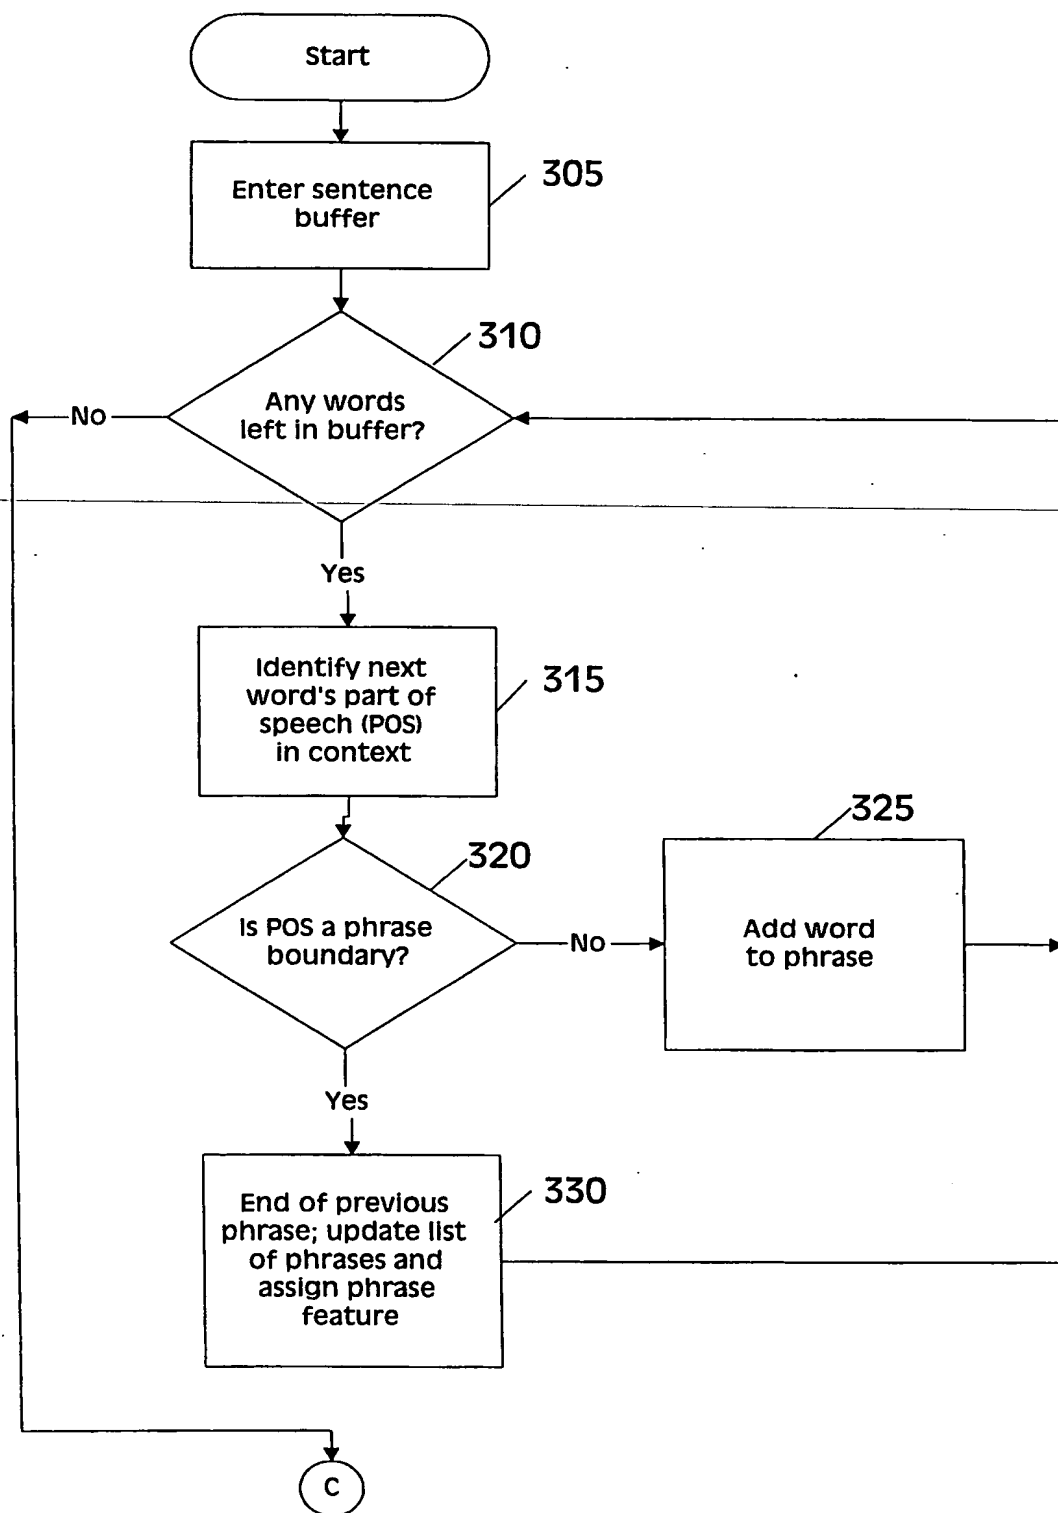
**Fig. 2A**

3/10

Fig. 2B

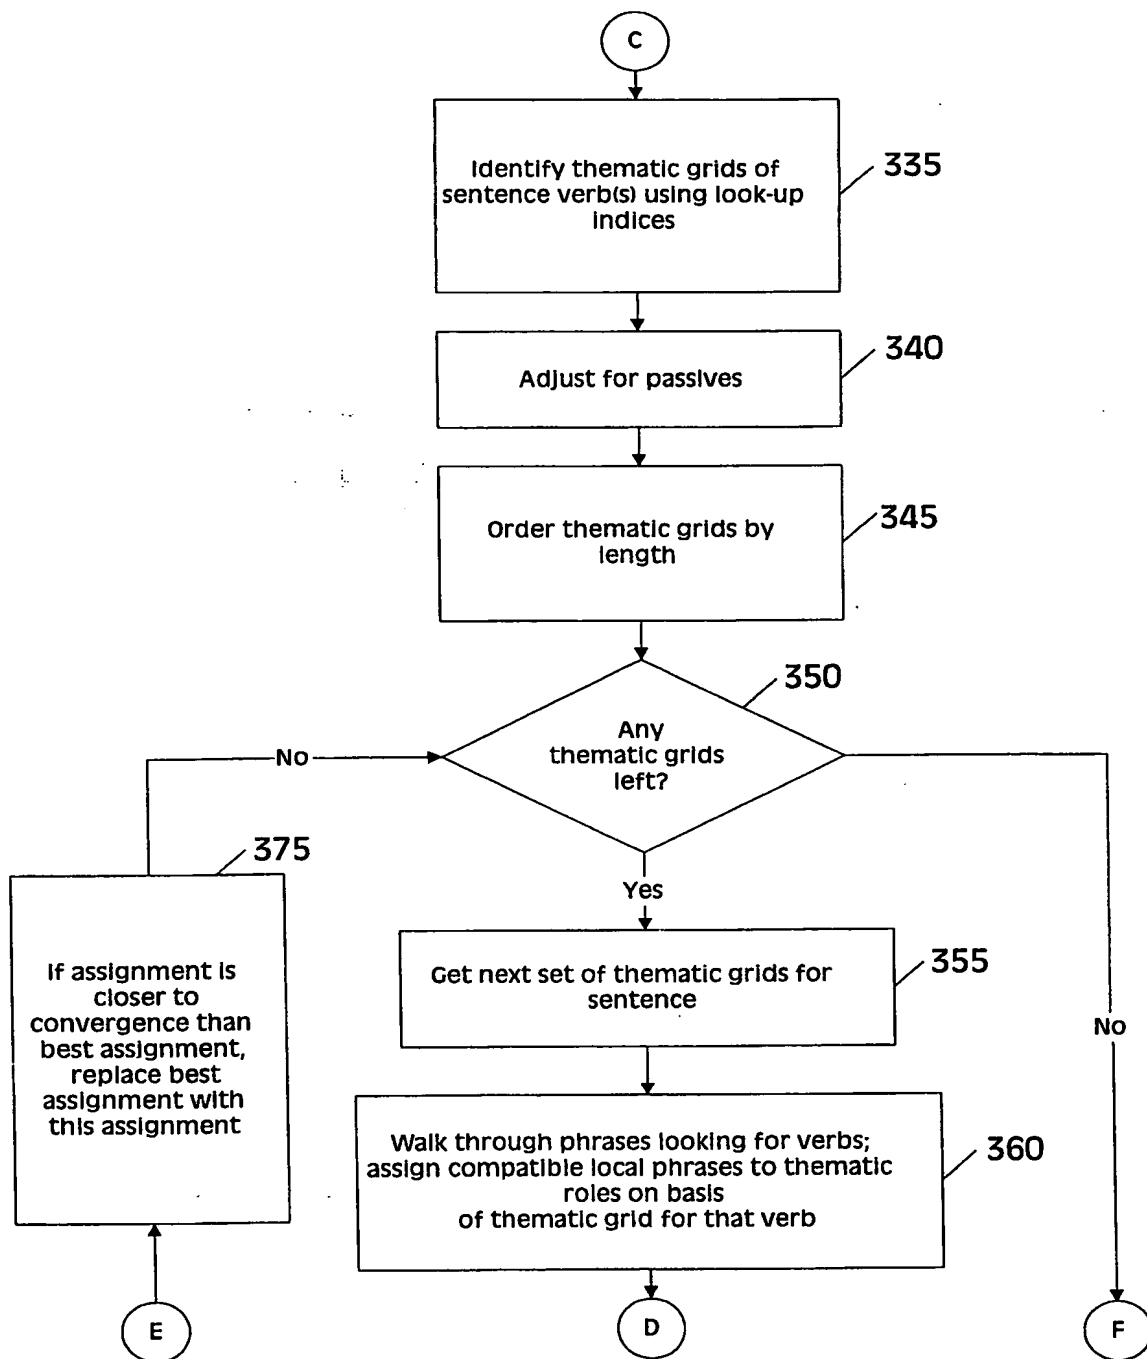


4/10

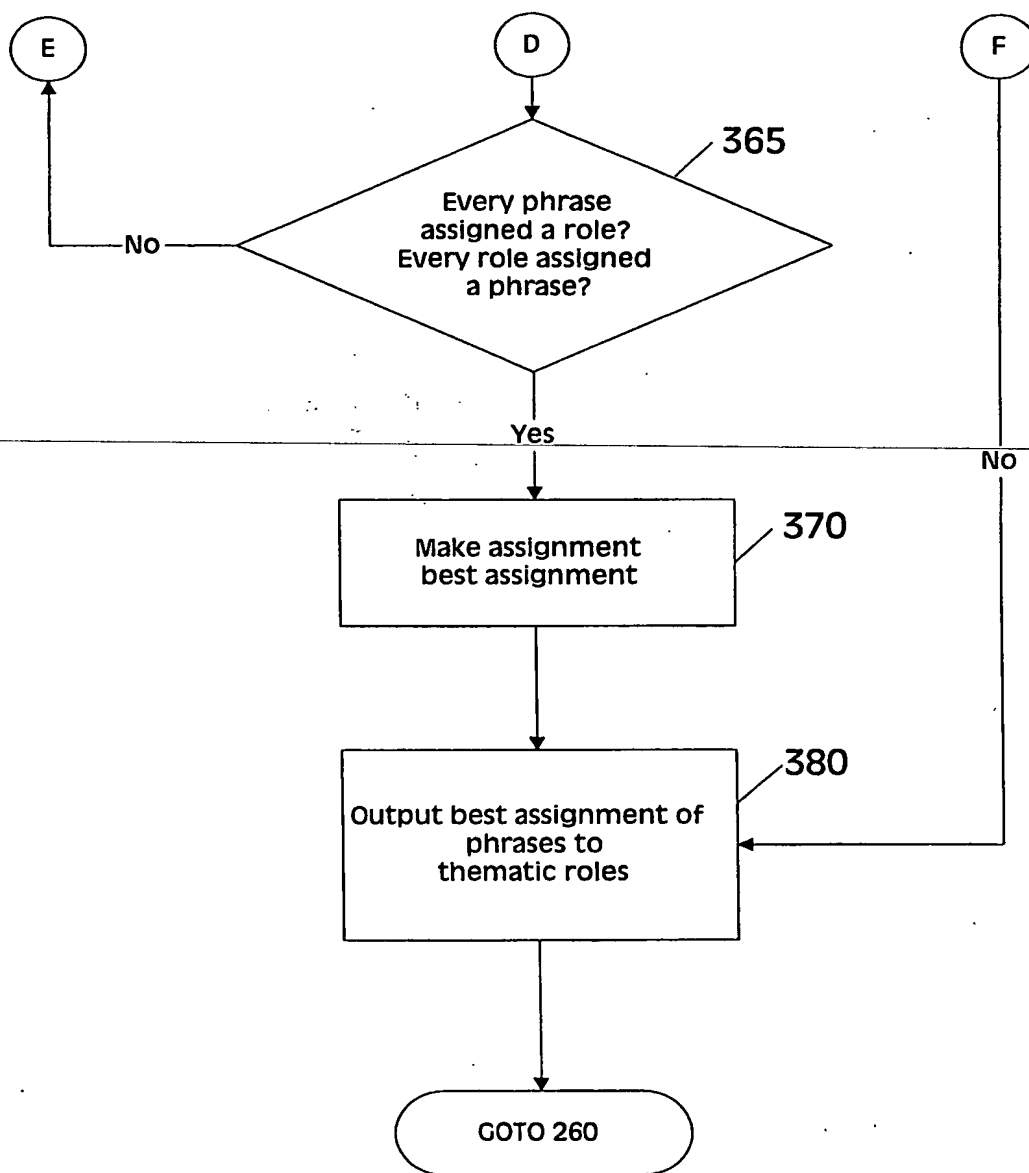
**Fig. 3A**

5/10

Fig. 3B



6/10

**Fig. 3C**

7/10

**Fig. 4A****Answers to question: When was Pluto discovered?**The Inn at 410 Bed & Brea

- (2) Lowell Observatory (astronomy center - planet Pluto was discovered here)

Astronomy options

- (3) Even the fellow who discovered Pluto while he was a graduate student in 1930 had a less-than-spectacular subsequent career because he never earned a Ph.D. (I don't know why he didn't get a doctorate, but then again, it was the depths of the Depression.

1930's General Events

- (2) The worldwide economic depression begins Planet Pluto discovered  
The depression deepens.

Flagstaff Attractions

- (3) The planet Pluto was discovered at Lowell Observatory in 1930.

Flagstaff, Arizona

- (3) The planet Pluto was discovered at Lowell Observatory in Flagstaff.

Almanac

- (3) In 1930, the ninth planet of our solar system, Pluto, was discovered.

8/10

**Fig. 4B**Flagstaff, AZ- What to S

- (3) In 1930, Pluto was discovered here.

Day Trip Itineraries

- (2) The planet Pluto was discovered here.

NORTHERN ARIZONA ATTRAC

- (3) The planet Pluto was discovered at Lowell Observatory in 1930.

HISTORY TEST

- (2) 1) The planet Pluto is discovered.

Travel

- (3) Back in Flagstaff proper, visit the Lowell Observatory atop Mars Hill, where the planet Pluto was discovered in 1930.

PLUTO

- (3) Pluto was discovered in 1903 by Clyde Tombough.  
(6) Pluto was first seen in Flagstaff Observatory in Arizona.  
(4) Charon takes 6.4 days to orbit Pluto.

Dr. Tombaugh's 90th birth

- (3) Clyde Tombaugh, who discovered Pluto in 1930, celebrated his \*90th birthday on February 4th.

9/10

**Fig. 4C**

(2) Have your students research Clyde Tombaugh's background and the discovery of Pluto.

(4) You will find a commentary entitled Clyde Tombaugh's Blinking Persistence at :

<http://www.jpl.nasa.gov/pluto/vol1a.htm> (that is vol one-a) and other related info on the discovery of Pluto at Pluto Home Page : <http://dosxx.colorado.edu/plutohome.html> THEN.

History of Space Explorat

(3) Moon The path of an object around the Sun Jupiter Major force that holds the planets in orbit around the Sun Hydrogen The last planet to be discovered Asteroid The largest of the planets Gravity The largest of Jupiter's moons Venus Lump of rock between Jupiter and Mars Ganymede Caused by the pull of the Moon's gravity Charon A natural satellite of Saturn Meteorite A Gas Giant planet surrounded by rings Comet Mars' other moon Tides The astronomer who discovered Uranus Buz Aldrin A hole caused by meteorite impact Milky Way Pluto's only moon Titan Space probes sent to look at Jupiter and Saturn Saturn Takes many years to orbit the Sun.

Mailing List WWW Gateway

(3) Clyde Tombaugh, who discovered Pluto in 1930, celebrate his \*90th birthday on February 4th.

(2) Have your students research Clyde Tombaugh's background and the discovery of Pluto.



10/10

**Fig. 4D**

(4) You will find a commentary entitled Clyde Tombaugh's Blinking Persistence at : <http://www.jpl.nasa.gov/pluto/vol1a.html> (that is vol one-a) and other related info on the discovery of Pluto at Pluto Home Page : <http://dosxx.colorado.edu/plutohome.html> THEN.

How Close Were They?

(3) Although Tombaugh had finally decided to ignore Lowell's predictions, and set about examining the whole sky, Pluto was discovered within six degrees of where Lowell and Pickering had independently predicted it to be.

(3) If Pluto was not Lowell's Planet X, its discovery marks one of the most incredible coincidences in the history of science.

No Title

(2) inferred from Neptune perturbation Planet X, discovered 1930 Pluto not massive enough most eccentric orbital plane most tilted retrograde rotation

engl518: Happy Birthday C

(3) Clyde Tombaugh, who discovered Pluto in 1930, has just turned 90 years old.5

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 97/22943

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A  A  A	<p>EP 0 631 244 A (XEROX CORP) 28 December 1994 see page 3, line 1 - page 11, line 45</p> <p>----</p> <p>RAYNER M ET AL: "Temporal relations and logic grammars" ECAI '86. 7TH EUROPEAN CONFERENCE ON ARTIFICIAL INTELLIGENCE. PROCEEDINGS, BRIGHTON, UK, 21-25 JULY 1986, 1986, LONDON, UK, CONFERENCE SERVICES, UK, pages 9-14 vol.2, XP002062196 see the whole document</p> <p>----</p> <p>EP 0 610 760 A (TOKYO SHIBAURA ELECTRIC CO) 17 August 1994 see column 13, line 22 - column 18, line 8</p> <p>----</p> <p>-/--</p>	<p>1-3, 25, 26, 28-30 5-9, 18-22, 31-33</p> <p>1-3, 5-26, 28-33</p> <p>1, 25</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 April 1998

Date of mailing of the international search report

04/05/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Fournier, C

PCT/US 97/22943

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 97/22943

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0631244 A	28-12-94	US 5519608 A	21-05-96
		JP 7056954 A	03-03-95
EP 0610760 A	17-08-94	JP 6231178 A	19-08-94
		JP 7182373 A	21-07-95